


remote I/O system excom®
PROFIBUS-DP fibre-optic coupler for zone 2
OC11Ex/3G

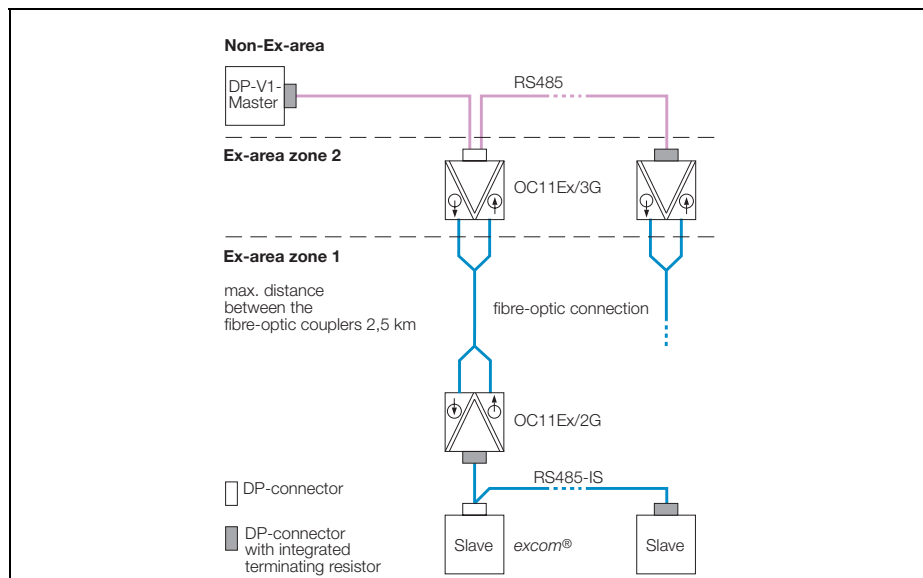

- Device for data transfer between electrical and optical fieldbus circuits
- max. 31 nodes possible on the electrical connection
- mounting possible in zone 2

remote I/O system excom®

PROFIBUS-DP fibre-optic coupler for zone 2

OC11Ex/3G

Type	OC11Ex/3G
Ident-No.	6890424
Test voltage	complete galvanic isolation acc. to EN 50020
Number of channels	1-channel
Ex approval acc. to conformity certificate	PTB 05 ATEX 2052 X // PTB 05 ATEX 2053 X
Device designation	Ex II (2) G [Ex ib or is] IIC
Operational readiness	1 x green
State/ Fault	2 x yellow / red
Degree of protection	IP20
Ambient temperature	-20 ...+ 70 °C
Relative humidity	95% at 55 °C acc. to EN 60069-2
Vibration test	according to IEC 68-2-6
Shock test	according to IEC 68-2-27
Dimensions	75 x 105.5 x 31 mm
Weight	293 g

Dimensions

